

GPS In-Line Lightning Arrestor



Key Features

- Industry's best RF Performance
- Low throughput energy
- Multi-strike capability

Lightning damages communications sites all over the world every day. Lightning does not have to strike the antenna to significantly damage the antenna or the GPS receiver. GPS antenna damage is usually due to the effects of a lightning strike on a nearby structure, not the result of a direct lightning strike. Since lightning strikes may induce damaging voltages in the antenna system when striking nearby objects, attempt to locate the antenna at least 15 meters away from lightning rods, towers, or structures that attract lightning. Also, locate the GPS antenna lower than any structures that will attract a strike.

Lightning arrestors will protect your systems from lightning damage. In-line lightning

arrestors are mounted on a low impedance ground between the antenna and the point where the cable enters the building. This is a commonly used configuration since there is often a good earth ground nearby to connect to. The lightning arrestors require no additional power or wiring except the ground lead.

If the cable between this lightning arrestor and the GPS receiver is longer than four meters, consider placing a second lightning arrestor within four meters of the GPS receiver. The second arrestor reduces any lightning-induced voltages in the cable to the receiver.

These units use separate RF (DC-Blocked) and dc paths through the protector. This design results in low throughput voltage and energy.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

GPS In-Line Lightning Arrestor

Specifications

Data and RF Specifications

- Frequency range: 800 to 2500 MHz
- Insertion loss: ≥ 0.1 dB over frequency range
- Voltage standing wave ratio: 1.1 : 1

Electrical Specifications

- Current: 4 Adc
- Power: 2.25 Watts RMS average
- Turn on: +16.5 V dc
- Turn on time: 4 ns for 2 kV / ns
- Operating voltage: +15 V
- Usage current: ≥ 4.0 mA continuous
- Unit impedance: 50 W
- Polarity: +

Interface Specifications

- Mounting: Bulkhead or flange
- Protected side connector: TNC Female 50 W
- Surge side connector: TNC Female 50 W

Product Includes

- Lightning arrestor, 25' or 50' Beldon 9104 cable with TNC terminations



Lightning Arrestor Kit (shown with 25' cable)


Environmental Specifications

- Relative humidity: to 95%
- Temperature range: -50°C to +85°C storage/operating
- Weatherization: Meets 60529 IPC67 Meets Bellcore #TA-NWT-000487 Procedure 4.11, wind drive (120 mph) rain intrusion test
- Maximum surge: 20 kA IEC 61000-4-5
8 / 20 microsecond waveform
- Throughput energy: ≥ 500 μ J @ 8 / 20 μ s Waveform

CE Compliance

EN 60950-1 2006/A11:2009/A1:2010 A12:2011
RoHS 2 2011/65/EU

Options and Ordering Information (contact Microsemi for pricing and availability)	Part Number
GPS Lightning arrestor kit w/25 ft. (7.5 m) cable	150-709
GPS Lightning arrestor kit w/50 ft. (15 m) cable	150-710

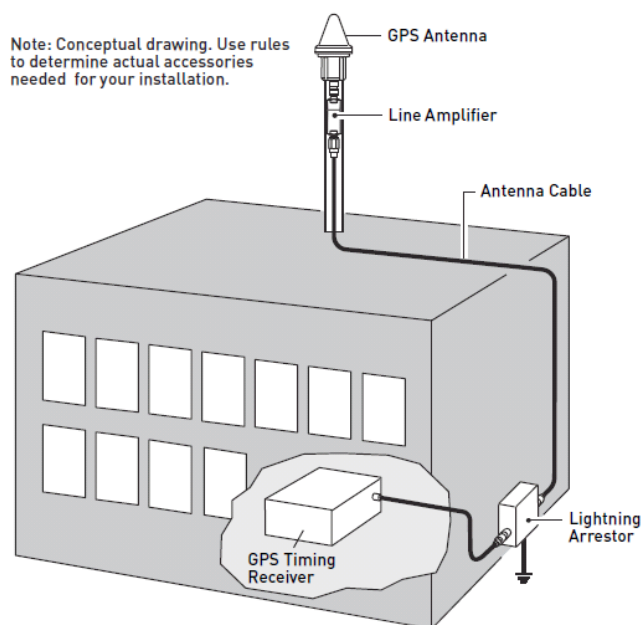

Common GPS Antenna Equipment Placement



Microsemi Corporate Headquarters
One Enterprise, Aliso Viejo, CA 92656 USA
Within the USA: +1 (800) 713-4113
Outside the USA: +1 (949) 380-6100
Sales: +1 (949) 380-6136
Fax: +1 (949) 215-4996
email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for communications, defense & security, aerospace and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; security technologies and scalable anti-tamper products; Ethernet Solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, Calif., and has approximately 3,600 employees globally. Learn more at www.microsemi.com.

©2016 Microsemi Corporation. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.