

1

2

3

4

5

6

7

A

A

B

B

C

C

D

D

E

E

F


F

G

G

H

H

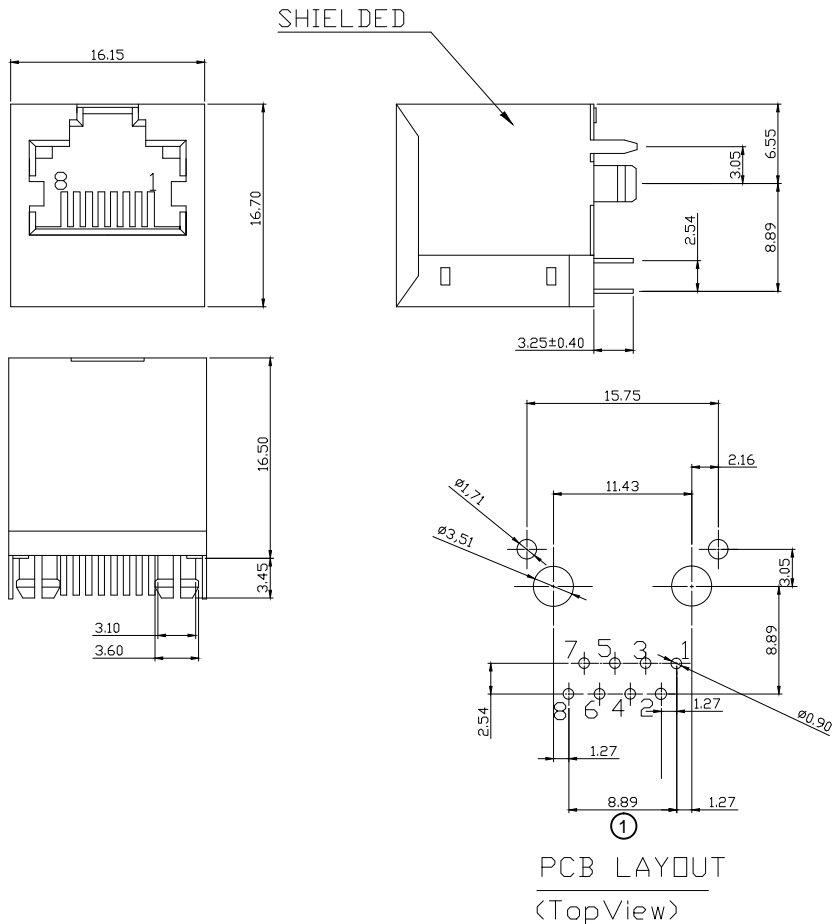

Specification:

- 1. Electrical Char
 - Insulation Resistance: 500MΩ min. 500V DC for 1 minute
 - Contact Resistance: 30mΩ max.
 - Rating Current: 1.5A max.
 - Rating Voltage: 150V AC
 - Dielectric Voltage: 1000 Vrms at 1MA 60 sec. min.
- 2. Physical Char
 - Housing: PBT Glass filled (UL 94V-0) Color: Black
 - Soldering Temperature: 235°C for 5 sec.
 - Spring Wire: 0.35mm Dia Phosphor Bronze
 - 6u" Gold plating over Nickel
 - Temperature Range: -40°C to +85°C
 - Durability: 750 mating cycles min.

3. Packing: Tray

RoHS compliant
Unit:mm

①	Scale	Free					Date	Name	Customer-No.	
	TOLERANCE						Drawn	04.08.2016	Winnie	
	.XX	±0.25					Approved	04.08.2016	Winnie	
	.XXX	±0.13							ASSMANN WSW-No. A-2014-2S-4-N-R	
	.XXXX	±0.05						Drawing-No.		
	DIM	TOL	①	Update	07.08.2018	Xavier			ASS 7330 CO	rev01
			②	Drawn	04.08.2016	Winnie				
	Angle	+0°30'	Id.	Modification	Date	Name	Replace	SHEET		

1

2

3

4

5

6

7