
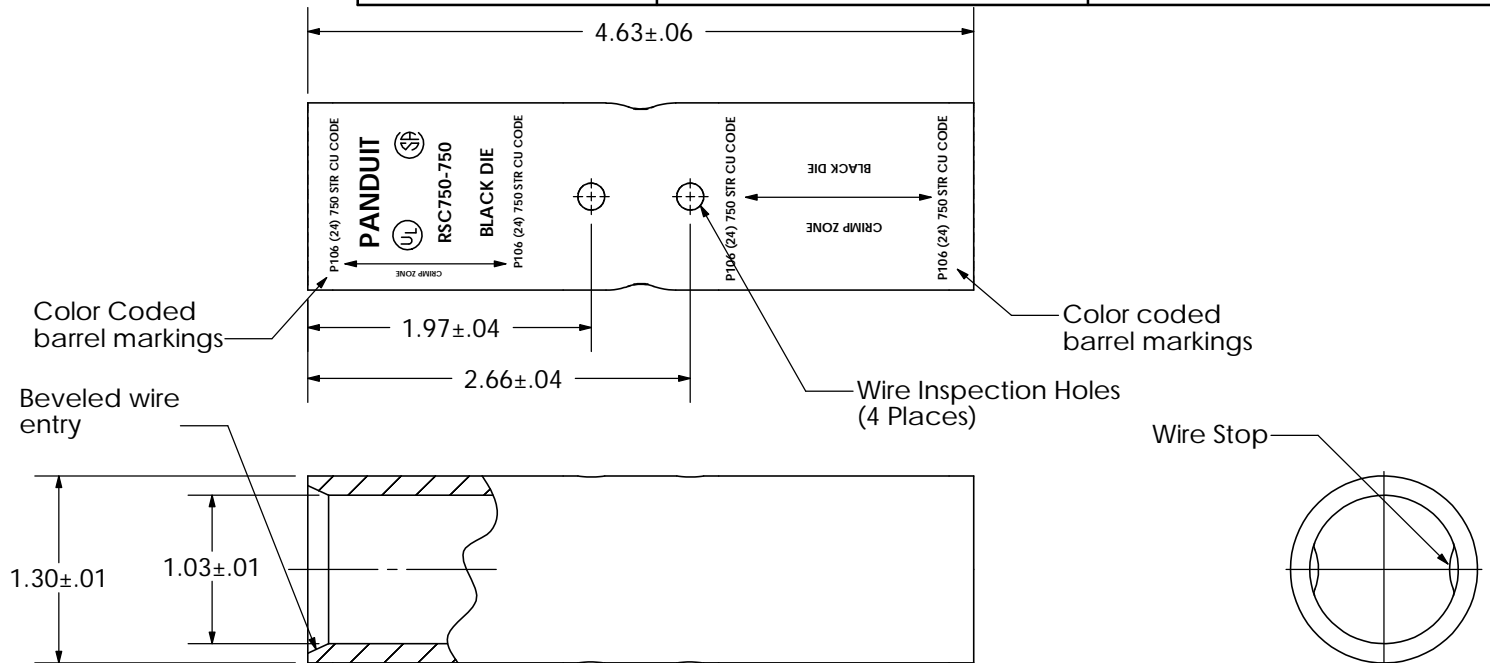


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes

	From	To
Wire Sizes	750 kcmil	750 kcmil
Wire Types	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric
Wire Strip Lengths	2.0 in.	2.0 in.
Panduit Color Code on Barrels	BLACK	BLACK
Panduit Die Index No. on Barrels	P106	P106
Alternate Industry Die Index No. () on Barrels	(24)	(24)

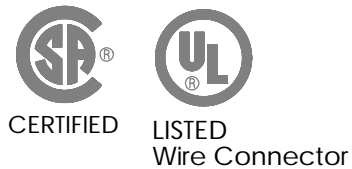

REV	DATE	BY	CHK	DESCRIPTION	ECN
01	3/04	JHNU	CSH	Removed dimension; added note.	11603

PANDUIT CORP. TINLEY PARK, ILLINOIS

RSC750-750-6
Copper Reducing Splice With Inspection Holes

SCALE N/A DRAWING NO / CAD FILE RSC750-750-CUST