TLP410DMUSB

Protect It!® Desktop-Grommet Surge Protector with USB Charging















Stores Flush to Desktop

1500 Joule Rating

Outlets

2 USB Charging Ports


Certified to UL 962A

\$20K Ultimate Lifetime Insurance

Lifetime Warranty

- NEMA 5-15R Surge Protected Outlets (4) (1500 Joule Rating)
- B USB Charging Ports (2) (Up to 2.4A total)
- 2 3/8" Grommet with Pivoting, Foldable Surge Protector (Certified to UL 962A and may be permanently mounted)
- Pull Ring
- **E** 10 ft. (3.05 m) Input Power Cord
- F NEMA 5-15P Input Plug

Also Includes: Owner's manual and 2 mounting clips.

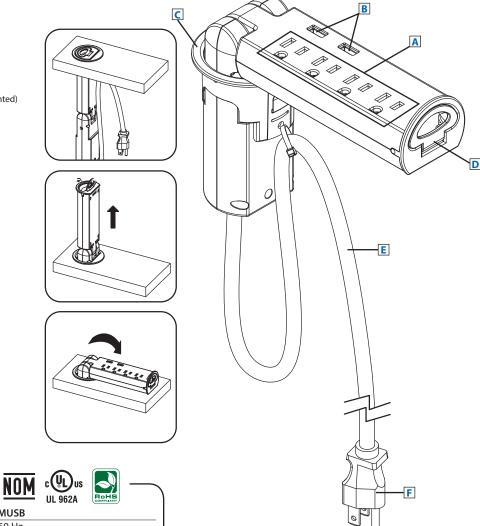


Specifications	NUM COLUS COMMILLAND
Model	TLP410DMUSB
Input Voltage	120V AC, 60 Hz
Outlets	(4) 5-15R
Plug Type/Cord Length	5-15P / 10 ft. (3.05 m)
Charging Ports	2 USB Ports (2.4A total)
Max Output Watts	1800W
Output Amperage	15A
Surge Protection Rating	1500 Joules
Protection Modes	Includes full normal mode (H-N) and common mode (N-G / H-G)
Clamping Voltage (RMS)	400
Unit Dimensions [H x W x D]	11.54 x 2.25 x 2.36 in. (292.3 x 57.2 x 59.8 mm)
Shipping Dimensions [H x W x D]	4.2 x 3.0 x 12 in. (106.7 x 76.2 x 304.8 mm)
Unit Weight	1.74 lb. (0.79 kg)
Shipping Weight	2 lb. (0.9 kg)
Standards	Certified to UL 1449 & UL 962A; conforms to IEEE 587/ANSI C62.41; meets NOM & RoHS Standards


- Certified to UL 962A and may be permanently mounted
- Pushes down flush with desktop surface when not in use
- Desktop grommet fits 2 3/8" (60 mm) holes


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com







SIDE VIEW

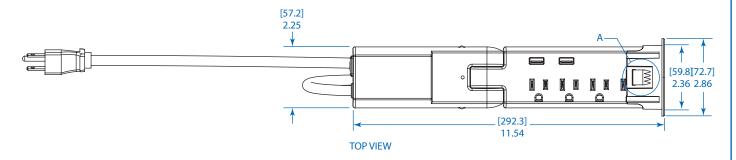



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.