

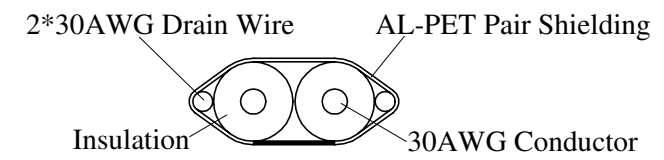



Cross Section C-C
SCALE 6:1

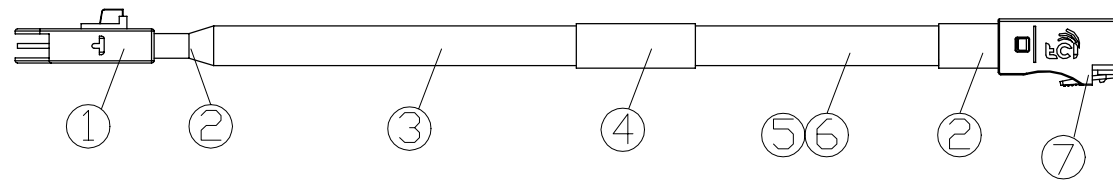

Parallel Pair Unit
SCALE 20:1

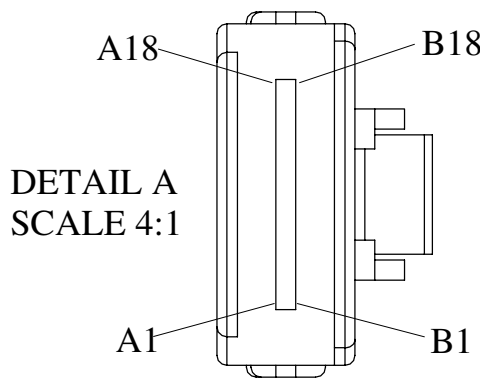

DETAIL A
SCALE 4:1

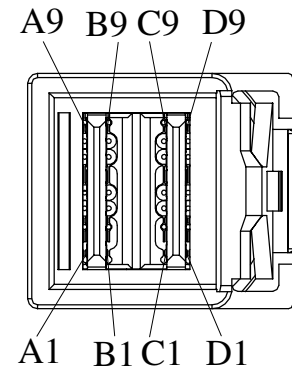

DETAIL B
SCALE 4:1

- NOTES:
- 100% CONTINUITY TESTED AS DEFINED IN WIRE DIAGRAM.
 - HI-POT TEST: DC 300V/10ms
CONNECTION RESISTANCE: 3.0 Ohm MAX.
INSULATION RESISTANCE: 10M Ohm MIN.
 - ROHS COMPLIANCE
 - PACKAGE SPECIFICATION REFER TO GS-14-1274.
 - A SYMBOL WILL BE NEXT TO ANY DIMENSION, VIEW OR NOTE WHICH HAS BEEN MODIFIED WITH THE CURRENT DRAWING REVISION

7	1	EA	HD miniSAS CONNECTOR KIT
6	A/R	MM	30AWG DISCRETE SINGLE WIRE FOR SIDEBAND SIGNAL
5	A/R	MM	30AWG PARALLEL PAIR 100 ohms DIFFERENTIAL CABLE, AL-PET+2*30AWG DRAIN WIRE zygomorphic FOR SHIELDING
4	1	EA	CABLE LABEL, BRIGHT WHITE
3	A/R	MM	PLASTIC BRAID, BLACK COLOR
2	A/R	MM	AC fabric tape or HS tube, BLACK COLOR
1	1	EA	miniSAS STRAIGHT CONNECTOR KIT
ITEM	Q'TY	UNIT	DESCRIPTION

www.fciconnect.com			surface	-	tolerance std	-	projection	MM
			TOLERANCES UNLESS OTHERWISE SPECIFIED				MM	
Dr	Andy Wu	2012-11-15	ANGULAR	0.X	±-	size	A3	Scale NTS
Eng	Andy Wu	2012-11-15	LINEAR	0.XX	±-			
Chr	Roger Cheng	2012-11-15	0° ±-	0.XXX	±-	ECN -		
Appr	Jackson Wang	2012-11-15	Product family			Spec ref -		
title			Internal miniSASHD to internal miniSAS ST cable assembly			dwg no		10120612
catalog no			-			CUSTOMER		sheet 1 of 2

rev	ecn no	dr	date
A		Andy	11/15/2012



Copyright FCI.


WIRE DIAGRAM:

P1 BACKPLANE			P2 CONTROLLER	
PIN	SYMBOL		SYMBOL	PIN
B18	GND	-----	GND	A9
B17	Tx3-		Rx3-	A8
B16	Tx3+		Rx3+	A7
B15	GND	-----	GND	B9
B14	Tx2-		Rx2-	B8
B13	Tx2+		Rx2+	B7
B12	GND	-----	GND	B6
B11	SB 5	←-----	SB 5	D1
B10	SB 4	←-----	SB 4	C1
B9	SB 3	←-----	SB 3	B1
B8	SB 7	←-----	SB 7	A1
B7	GND	-----	GND	A6
B6	Tx1-		Rx1-	A5
B5	Tx1+		Rx1+	A4
B4	GND	-----	GND	A3
B3	Tx0-		Rx0-	B5
B2	Tx0+		Rx0+	B4
B1	GND	-----	GND	B3
A18	GND	-----	GND	C9
A17	Rx3-	←-----	Tx3-	C8
A16	Rx3+	←-----	Tx3+	C7
A15	GND	-----	GND	D9
A14	Rx2-	←-----	Tx2-	D8
A13	Rx2+	←-----	Tx2+	D7
A12	GND	-----	GND	D6
A11	SB 6	←-----	SB 6	D2
A10	SB 2	←-----	SB 2	C2
A9	SB 1	←-----	SB 1	B2
A8	SB 0	←-----	SB 0	A2
A7	GND	-----	GND	C6
A6	Rx1-	←-----	Tx1-	C5
A5	Rx1+	←-----	Tx1+	C4
A4	GND	-----	GND	C3
A3	Rx0-	←-----	Tx0-	D5
A2	Rx0+	←-----	Tx0+	D4
A1	GND	-----	GND	D3

TABLE 1:

CUSTOMER P/N	FCI P/N	REVISION	WIRE GAUGE	LENGTH("L")	TOLERANCE
TBD	10120612-2020LF	A	30AWG	200 mm	±15mm
TBD	10120612-2030LF	A	30AWG	300 mm	±15mm
TBD	10120612-2040LF	A	30AWG	400 mm	±15mm
TBD	10120612-2050LF	A	30AWG	500 mm	±15mm
TBD	10120612-2060LF	A	30AWG	600 mm	±15mm
TBD	10120612-2070LF	A	30AWG	700 mm	±15mm
TBD	10120612-2080LF	A	30AWG	800 mm	±15mm
TBD	10120612-2090LF	A	30AWG	900 mm	±15mm
TBD	10120612-2100LF	A	30AWG	1000 mm	±20mm

CABLE LABEL SPEC.:

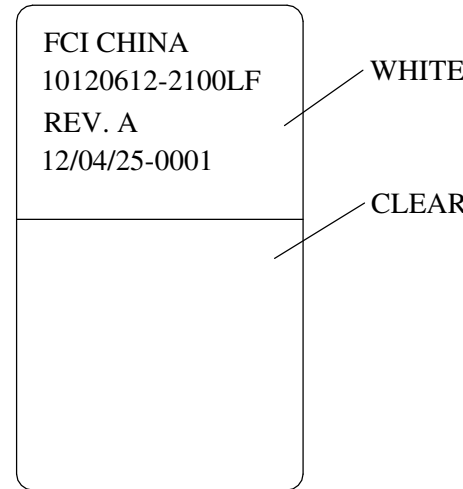

LABEL NOTES:

- A. FCI PN and Revision: see table 1
- B. 12/04/25-0001
 - SN: SERIAL NUMBER
 - DD: DATE
 - MM: MONTH
 - YY: YEAR
- C. SN: START FROM 0001... WHICH COULD NOT BE REPEAT.



Copyright FCI.

rev	ecn no	dr	date

www.fciconnect.com		surface - ✓	tolerance std -	projection	MM
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	Andy Wu	2012-11-15	ANGULAR	0.X ±	size A3
Eng	Andy Wu	2012-11-15	LINEAR	0.XX ±	Scale NTS
Chr	Roger Cheng	2012-11-15	0° ±'	0.XXX ±	ECN -
Appr	Jackson Wang	2012-11-15	Product family	Spec ref -	
		title Internal miniSASHD to internal miniSAS ST cable assembly		dwg no 10120612	Rev. A
catalog no -		CUSTOMER		sheet 2 of 2	